


# TELIA INTERNETIKÕNED: ARVUTITELEFONI X-LITE SEADISTAMINE WINDOWS-IGA ARVUTISSE

Internetikõnede teenust saab X-lite rakenduse abil kasutada mobiilinumbrilt helistamiseks oma arvutis. See on mugav ning võimaldab nt pidevalt kontoris laua taga olles kasutada oma mobiilinumbrilt helistamiseks otse arvutist. Vajalik on vaid mikrofoni ja kõlarite/kõrvaklappide olemasolu, mis enamikel sülearvutitel on juba sisse ehitatud.

Arvutis töötab mobiilnumber vaid siis, kui arvuti on sisse lülitatud ning internetiühendus aktiivne.

NB! Internetikõnede teenusega kõne Hädaabi numbrile 112 ei võimalda sinu asukoha tuvastamist. Zoiperiga välismaal tehtud hädaabikõnele vastatakse Eestis.

1. Lae alla ja installeeri [X-Lite](#) oma arvutisse.
2. Käivita X-Lite tarkvaratelefon.
3. Seadista Internetikõnede konto:

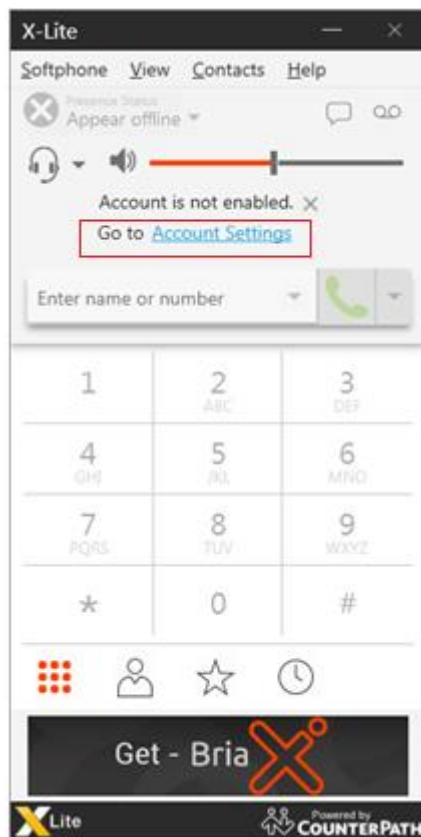

- Sisesta konto andmed:

Account name: *konto nimi, nt mobiilnumber*

User ID: *+372mobiilnumber*

Domain: *ims.mnc001.mcc248.3gppnetwork.org*

Password: *teenuse tellimisel SMSiga saadetud Internetikõnede konto salasõna*

Display Name: *mobiilnumber*

Authorization name: *+372mobiilnumber@ims.mnc001.mcc248.3gppnetwork.org*

Proxy Address: *proxy.telia.ee*

- tee valikud:

Allow this account for Call

Register with domain and receive calls

Proxy Address


- *Advanced* seadetes sisesta Reregister every: lahtrisse 60

The image shows two screenshots of the SIP Account configuration dialog. The left screenshot shows the 'Account' and 'Advanced' tabs. The 'Account' tab has fields for Account name (mobiilnumber), Protocol (SIP), and 'Allow this account for' (Call checked, IM / Presence unchecked). The 'Advanced' tab has fields for User ID (+372mobiilnr), Domain (ims.mnc001.mcc248.3gppnetw), Password (masked), Display name (mobiilnumber), Authorization name (+372mobiilnr@ims.mnc001.r), and Domain Proxy (Register with domain and receive calls checked, Send outbound via Proxy Address: proxy.telia.ee). The right screenshot shows the 'Advanced' tab with Register Settings (Reregister every: 60 seconds, Minimum time: 20 seconds), Timers (Enable session timers unchecked, Session timer preference: Inactive, Default session time: 90 seconds), Hold method (Handle hold request in M-line only selected), and Connection Management (Send SIP keep-alives checked, Use rport checked, Use SIP Outbound unchecked, Force outbound proxy on all requests). Both screenshots have OK and Cancel buttons at the bottom.

- Transport seadetes vali Signaling transport: UDP

The image shows a screenshot of the SIP Account configuration dialog with the 'Transport' tab selected. The 'Signaling transport' dropdown menu is set to 'UDP'. There are OK and Cancel buttons at the bottom.

4. Softphone>>Preferences>>Calls>>DTMF vali „Send in-band“

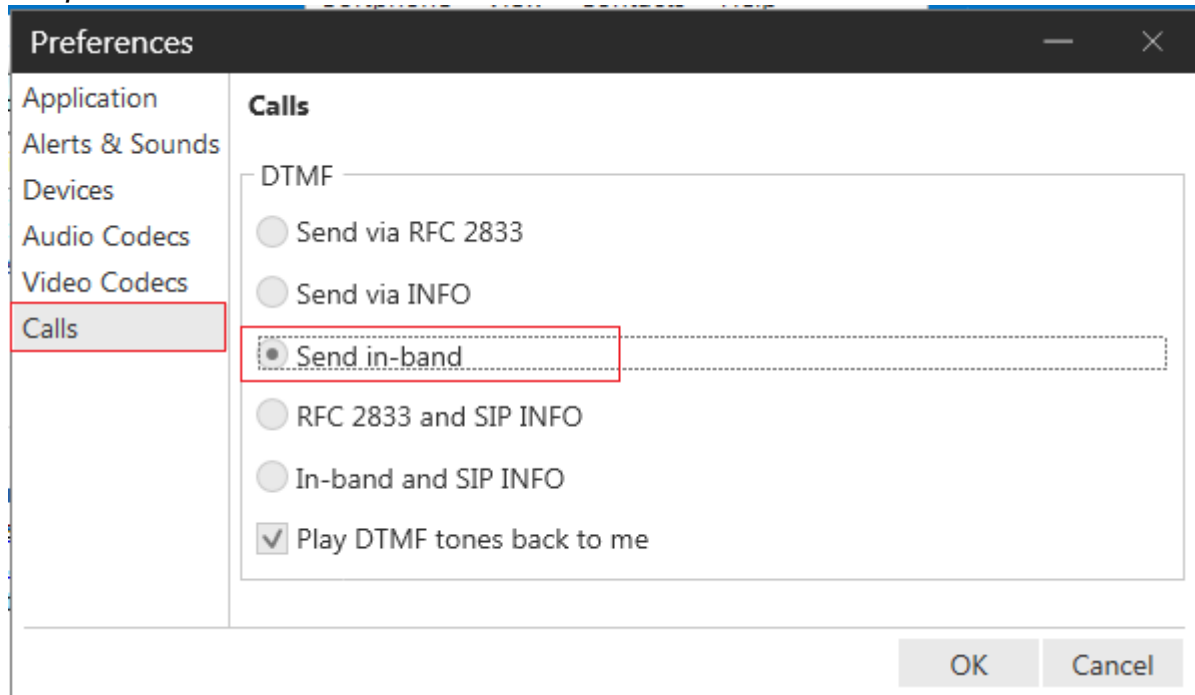

Vaata üle / vali heliseadmed (*Devices*) ning tarkvaratelefoni märguanded ja helid (*Alerts & Sounds*)

5. Tarkvaratelefon on kasutamiseks valmis:

