


# ИНТЕРНЕТ-ЗВОНКИ TELIA: НАСТРОЙКА КОМПЬЮТЕРНОГО ТЕЛЕФОНА НАСТРОЙКА ТЕЛЕФОНА X-LITE В КОМПЬЮТЕРЕ WINDOWS

Услугой Интернет-звонков можно пользоваться и через приложение X-lite, предназначенное для звонков с мобильного номера через компьютер. Это удобно и позволяет, например, если Вы постоянно находитесь за столом в офисе, пользоваться своим мобильным номером непосредственно с компьютера. Нужен только микрофон и динамики (колонки, наушники), которые в большинстве ноутбуков уже встроены.

Мобильный номер будет работать на компьютере только тогда, когда компьютер включен и имеется интернет-соединение.

**NB!** Звонок в Службу экстренной помощи по номеру 112 через услугу интернет-звонков не позволяет определить Ваше местонахождение. На экстренные вызовы через Zoiper отвечают в Эстонии.

1. Скачайте и установите на свой компьютер [X-Lite](#) .
2. Запустите программный телефон X-Lite.
3. Настройте учетную запись услуги Интернет-звонков:

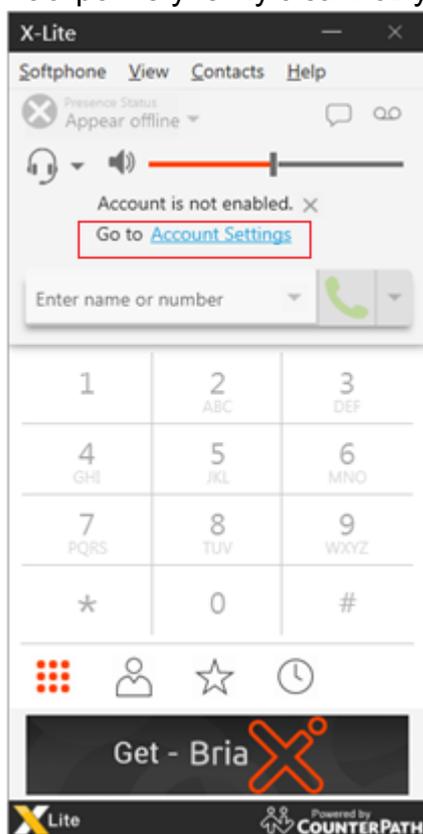

– Введите данные учетной записи:

Account name: *название учетной записи, например, мобильный номер*

User ID: +372мобильныйномер

Domain: *ims.mnc001.mcc248.3gppnetwork.org*

Password: *пароль, присланный в SMS при заказе услуги Интернет-звонков*

Display Name: *мобильныйномер*

Authorization name:

*+372мобильныйномер@ims.mnc001.mcc248.3gppnetwork.org*

Proxy Address: *proxy.telia.ee*

– выберите:

Allow this account for Call


Register with domain and receive calls

Proxy Address


– в настройках Advanced введите в поле 60 «Reregister every».

The image shows two screenshots of the SIP Account configuration window. The left screenshot shows the 'Account' tab with the following fields: Account name: mobiilnumber, Protocol: SIP, Allow this account for: Call (checked), IM / Presence (unchecked), User Details: User ID: +372mobiilnr, Domain: ims.mnc001.mcc248.3gppnetw, Password: [masked], Display name: mobiilnumber, Authorization name: +372mobiilnr@ims.mnc001.n, Domain Proxy: Register with domain and receive calls (checked), Send outbound via: Proxy (selected), Proxy Address: proxy.telia.ee. The right screenshot shows the 'Advanced' tab with the following sections: Register Settings: Reregister every: 60 seconds, Minimum time: 20 seconds; Timers: Enable session timers (unchecked), Session timer preference: Inactive, Default session time: 90 seconds; Hold method: Handle hold request in M-line only (latest standard) (selected); Connection Management: Send SIP keep-alives (checked), Use rport (checked), Use SIP Outbound (unchecked), Force outbound proxy on all requests (unchecked). Both screenshots have OK and Cancel buttons at the bottom right.

– в настройках Transport выберите «Signaling transport: UDP»

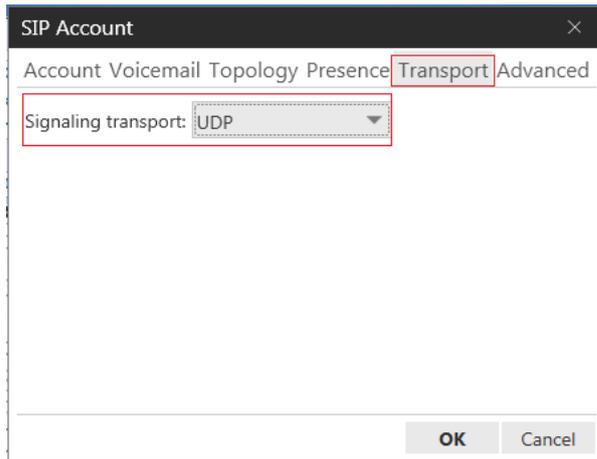

4. Softphone > Preferences > Calls > DTMF выберите «Send in-band»

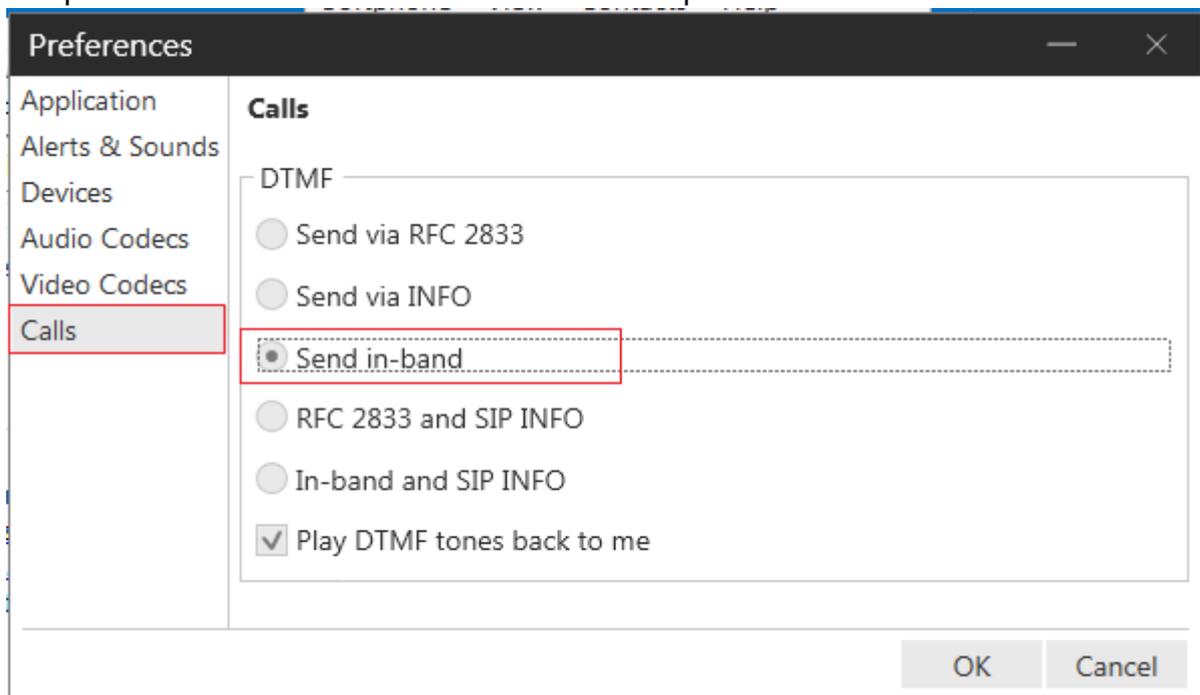

Проверьте или выберите аудиоустройство (Devices) и выберите сигналы и звуки программного телефона (Alerts & Sounds)

5. Программный телефон готов к работе:

